lincat

LINCAT SILVERLINK PROPANE GAS COUNTER-TOP SALAMANDER GRILL - W 600 MM - 5.0 KW

MODEL: GR3/P



Sometimes during fast turnaround times, you need to be able to toast and grill at speed. The Silverlink 600 Gas Salamander Grill is ideal for these scenarios. Perfect for any modestly-sized, fastpaced restaurant, pub or takeaway, the grill boasts powerful ceramic plaque burners for rapid heat up, with five shelf positions to give maximum flexibility for all catering operations. Easy to clean, it also comes with a chrome wire shelf to allow trays and food to be placed on for cooking. Producing perfectly grilled meat, fish, and toast has never been as simple or stress-free.

SILVERLINK 600

PRODUCT OPTIONS AND ACCESSORIES

- GR3/BS BENCH STAND FOR GR3 H410,D350,W605
- ABP03 BRANDING PLATE KIT
- CH01 CATERFLEX HOSE 1/2" 1 METRE
- CH02 CATERFLEX HOSE 1/2" 1.5 METRE
- GR3/FS FLOOR STAND FOR GR3 H1260,D350,W605
- GR3/WS WALL SHELF FOR GR3

PRODUCT FEATURES

- Powerful ceramic plaque burners for rapid heat up
- 5 shelf positions to give maximum flexibility for all catering operations
- · Chrome wire shelf to allow trays and food to be placed on for cooking
- Cool touch handles for safety
- Enamelled interior and hood for easy cleaning

AIA FILE NUMBER:







LINCAT SILVERLINK PROPANE GAS COUNTER-TOP SALAMANDER GRILL - W 600 MM - 5.0 KW

MODEL: GR3/P

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	423 mil
Height	408 mil
Weight	20.5 kg

SHIPPING DETAILS	
Ship Width	70 cm
Ship Depth	55 cm
Ship Height	49.5 cm
Ship Weight	22.55 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Gas
Electrical Kilowatts	5 kW
Electrical Plug Type	Not Applicable
Number of Electrical Plugs	Not Applicable
Electrical Connection Type	Not Applicable
Gas Type	Propane

Gas Total BTUs	17060 BTU
Gas Inlet Size	0.5 in
Gas Inlet Pressure Required	37 mBar
Gas Consumption at Max Use Per Hour	0.36 m ³
Total Heat Input at Max Use	5 kW, 17100 BTU per hour

ADDITIONAL SPECIFICATIONS

Broiler Base Configuration	Not Applicable
Broiler Type	Salamander
Construction Materials	Stainless Steel
Control Type	Mechanical
Cooking Area Plate Depth	225 mm
Cooking Area Plate Width	410 mm

Food Production Rate	42 x 115g [4oz] burgers [frozen] per hour
Heat Location	Top Only
Heat Source Type	Ceramic
Number of Heating Zones	1
Number of Shelf Positions	4
Ventless Cooking Technology	No

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025






LINCAT SILVERLINK PROPANE GAS COUNTER-TOP SALAMANDER GRILL - W 600 MM - 5.0 KW

MODEL: GR3/P

TECHNICAL DRAWING

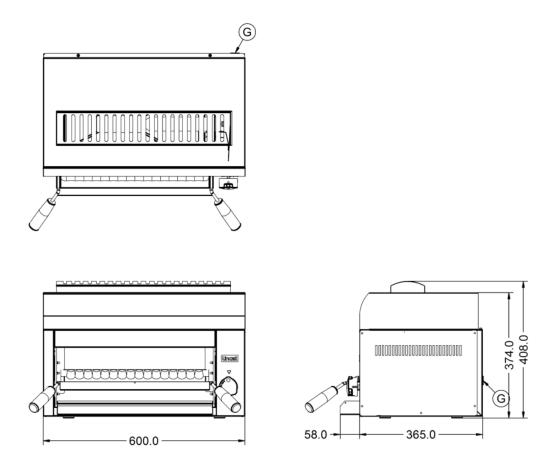

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025

