



There's no longer any need to make room for a boiler and a chiller. The FilterFlow Combined Water Boiler and Chiller does both jobs perfectly. It's compact, but extremely versatile and flexible. Whether you're in the mood for a warming hot drink or a refreshingly cool glass of water, the boiler / chiller won't let you down. Its intuitive, touch screen display means it's easy to use too.

PRODUCT OPTIONS AND ACCESSORIES

- DP10 DESCALER POWDER
- FC04 EBFX WATER FILTER - FROM 2015
- PI36 INLET CONNECTION HOSE EB

PRODUCT FEATURES

- Convenient push button operation, ideal for front of house and self service
- Filtered chilled and hot water on tap 24 hours a day, space saving and economic - no need for a separate boiler and chiller
- Narrow 250mm footprint saves valuable counter space without compromising capacity or performance
- Built-in water filtration system improves water quality and reduces scale build-up. High volume, easy change FilterFlow cartridge
- Easily operated from a large, colour touchscreen display. Menu navigation is quick and easy with the temperature and timer simple to adjust
- Enhanced diagnostics identify possible causes. The on screen diagnostic information will enable the engineer to identify the parts needed and repair your water boiler at first visit



LINCAT FILTERFLOW COUNTER-TOP COMBINED WATER BOILER & CHILLER WITH PUSH BUTTON DISPENSE - W 250 MM - 3.0 KW

MODEL: EB3FX/HC/PB

WEIGHTS & DIMENSIONS

Width	250 mil
Depth	570 mil
Height	595 mil
Weight	24.8 kg

SHIPPING DETAILS

Ship Width	65 cm
Ship Depth	38 cm
Ship Height	88 cm
Ship Weight	27.28 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

WATER, PLUMBING, AND DRAINAGE SPECS

Water Line Required	Yes
Water Connection Source Type	Water Main
Water Inlet Size	0.75 in
Water Inlet Pressure	6 Bar
Drain Line Required	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric
Electrical Total Amperage	13 A
Electrical Volts	230V
Electrical Total Wattage	3000 W
Electrical Kilowatts	3 kW
Electrical Phase	1-Phase

Electrical Plug Type	UK 3-Pin Plug
Number of Electrical Plugs	1
Electrical Connection Type	Cord and Plug
Number of Electrical Conductor Wires	1
Dedicated Circuit Required	No
Electrical Remarks	Single

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
January 09, 2025





LINCAT FILTERFLOW COUNTER-TOP COMBINED WATER BOILER & CHILLER WITH PUSH BUTTON DISPENSE - W 250 MM - 3.0 KW

MODEL: EB3FX/HC/PB


ADDITIONAL SPECIFICATIONS

Capacity Volume	7 l	Hourly Number of Hot Cups	140
Construction Materials	Stainless Steel	Rapid Draw Off Hot	5 l
Control Type	Electronic	Rapid Draw Off Hot Cups	25 C
Hourly Cold Water Output	12 l	Ventless Cooking Technology	No
Hourly Hot Water Output	28 l	Temperature Maximum	98 °C
Hourly Number of Cold Cups	60	Temperature Minimum	11 °C

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

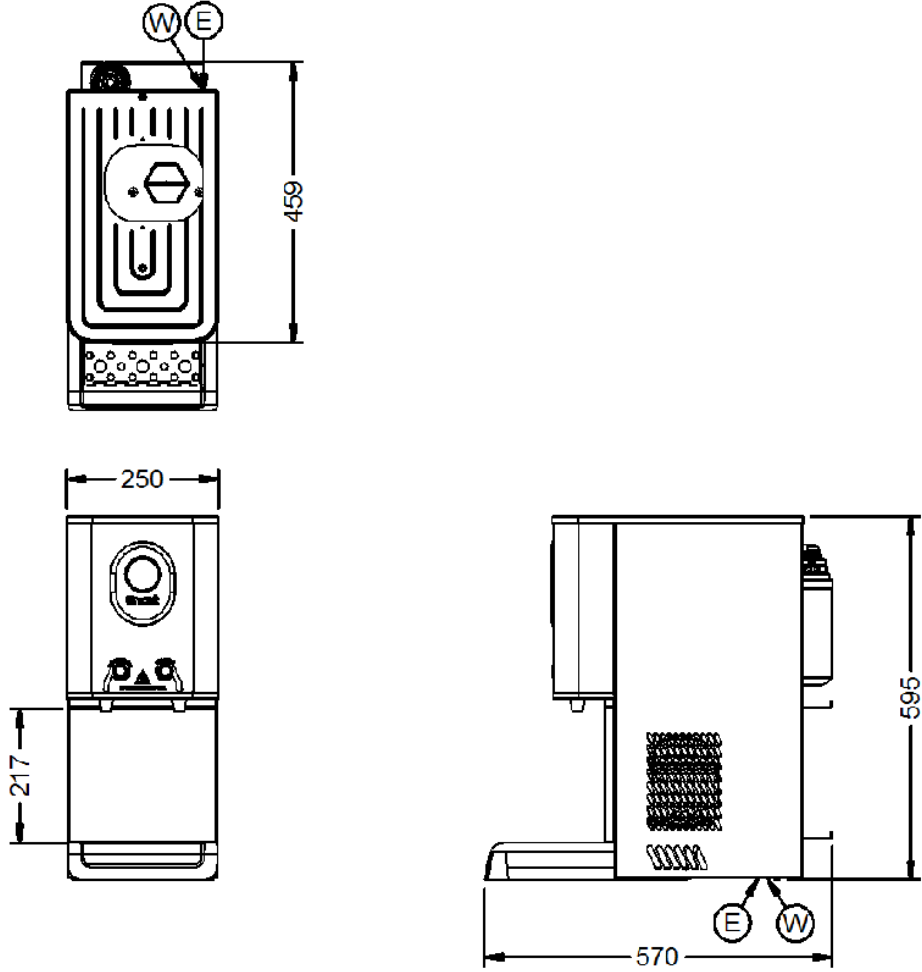

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
January 09, 2025