



**IMC VENTUS VR60 GLASS FROSTER [FRONT LOAD] - GLASS DOOR
- STAINLESS STEEL FRAME - H 800 MM - W 600 MM**

MODEL: F49/602



Ventus

PRODUCT OPTIONS AND ACCESSORIES

- S76/048 Perforated Shelf - for V60 - 500D
- A12/091/Z1 Wire Shelf - Chrome - for M60 Bottle Cooler

PRODUCT FEATURES

- Reduced 800mm height
- Wide range of options available to customise your glass froster, ensure a perfect fit in any bar
- Chills and frosts glasses, to enhance the taste and appearance of drinks
- Dynamic Air Distribution System coupled with efficient compressors and improved insulation ensures superior cooling times
- Rapid chill to -10°C to keep drinks colder for longer
- Energy efficient EcoSmart controller - at the touch of a button, put the glass froster into its most economical state until next required
- Efficient design means up to 50 pint glasses can be chilled at the same time
- Front loading design ensures fast and easy access to ice cold glasses
- Stylish stainless steel exterior to suit any commercial bar setting
- UK 3 pin plug - simply plug in and switch on

The perfect addition to any commercial bar, the VR60 rapidly chills glasses and liqueurs down to -10°C, to provide high-quality drinks that look great, stay colder for longer and with minimal dilution, as there is no need for ice.

The VR60's shelving provides storage for up to 50 pint glasses, whilst its front-loading design gives bar staff easy access, so drinks can be served quickly.

With a stylish stainless steel exterior, the VR60 complements any bar setting.

AIA FILE NUMBER:

ITEM NUMBER:



IMC VENTUS VR60 GLASS FROSTER [FRONT LOAD] - GLASS DOOR - STAINLESS STEEL FRAME - H 800 MM - W 600 MM

MODEL: F49/602

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	500 mil
Height	800 mil
Weight	57.5 kg

SHIPPING DETAILS

Ship Width	67 cm
Ship Depth	58 cm
Ship Height	106 cm
Ship Weight	65 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Number of Electrical Plugs	1
Electrical Total Amperage	2.9 A	Electrical Connection Type	Cord and Plug
Electrical Volts	240V	Number of Electrical Conductor Wires	1
Electrical Total Wattage	667 W	Dedicated Circuit Required	No
Electrical Kilowatts	0.667 kW	Electrical Remarks	Single
Electrical Phase	1-Phase	Energy Saving	Yes
Electrical Plug Type	UK 3-Pin Plug		

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter	Number of Shelf Positions	29
Capacity Volume	108 l	Number of Shelves	2
Control Type	Digital Touch Pad, Electronic	Refrigerant Type	R-290
Defrost Method	Automatic	Temperature Maximum	-10 °C
Insulated	Yes	Temperature Minimum	2 °C
		Type of Lighting	LED

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024








IMC VENTUS VR60 GLASS FROSTER [FRONT LOAD] - GLASS DOOR
- STAINLESS STEEL FRAME - H 800 MM - W 600 MM

MODEL: F49/602

TECHNICAL DRAWING

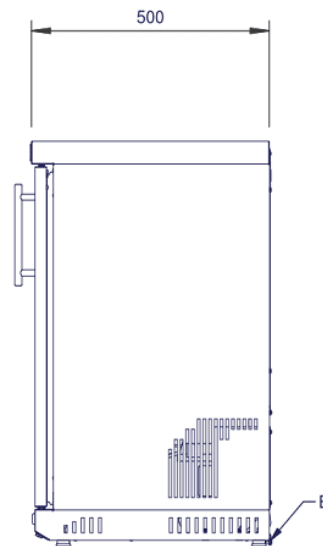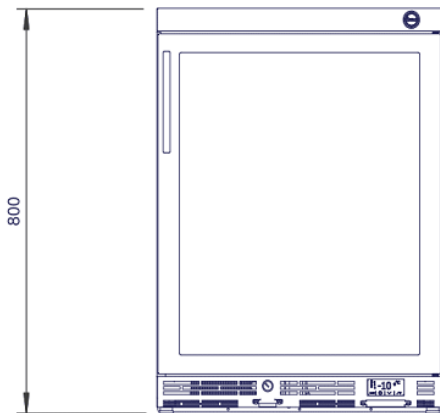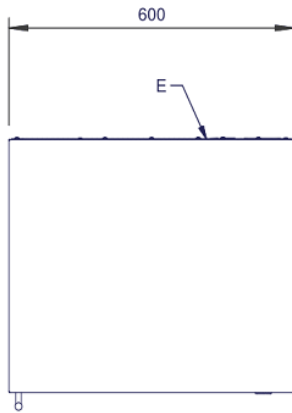

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024