



IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER - 3 PHASE [4 WIRE] - W 514 MM - 2.2 KW

MODEL: F54/621



Fast and efficient, the 1204X Waste Disposer is able to dispose of 700kg of food waste per hour and handles up to 1450 covers per sitting, making it ideal for larger hotels, hospitals, universities, prisons and food preparation companies.

An advanced version of the 1204 model, the 1204X is able to switch itself off to save energy and has an automatic rinse function, to prevent nasty odours.

It is suitable for tough waste - red meat bones, cauliflower stalks and fish skins. The free-standing unit can be welded into tabling with a E30/096 hopper rim, for quick loading.

PRODUCT OPTIONS AND ACCESSORIES

- E30/096 Hopper Rim for 1204/1204X/1604/1604X Food Waste Disposer

PRODUCT FEATURES

- Fast and efficient disposal of up to 700kg of food waste per hour.
- Handles up to 1450 covers per sitting - ideal for large kitchens.
- For tough waste (red meat bones, cauliflower stalks and fish skins).
- Free-standing design, but can be welded into tabling with E30/096 hopper rim.
- Manually reversible motor to extend operational life.
- Low-load cut-outs ensure energy and water efficiency.
- Suitable for large kitchens with three-phase, four-wire power supply.

A/A FILE NUMBER:

ITEM NUMBER:



IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER - 3 PHASE [4 WIRE] - W 514 MM - 2.2 KW

MODEL: F54/621

WEIGHTS & DIMENSIONS

Width	514 mil
Depth	740 mil
Height	850 mil
Weight	74 kg

SHIPPING DETAILS

Ship Width	79 cm
Ship Depth	54 cm
Ship Height	105 cm
Ship Weight	81.4 kg
Number of Shipment Parcels	1
Ship Method	LTL Common Carrier
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Number of Electrical Plugs	Not Applicable
Electrical Total Amperage	5.1 A	Electrical Connection Type	Direct Hardwired
Electrical Volts	400V	Number of Electrical Conductor Wires	1
Electrical Total Wattage	2200 W	Dedicated Circuit Required	Yes
Electrical Kilowatts	2.2 kW	Electrical Remarks	Three
Electrical Phase	3-Phase	Energy Saving	No
Electrical Plug Type	Hardwired		

ADDITIONAL SPECIFICATIONS

Airbreak	No
Control Type	On/Off
Meal Waste Servings Processed Per Sitting	1450
Motor Power	3 hp
Operator Safety Method	Interlock
Self-Cleaning Capable	No
Waste Processing Capacity Per Hour: Weight	700 kg
Waste Types Processed	Tough (all red meat bones, cauliflower stalks, fish skins)

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024






**IMC VULTURE 1204X FLOOR-MOUNTED FOOD WASTE DISPOSER -
3 PHASE [4 WIRE] - W 514 MM - 2.2 KW**

MODEL: F54/621

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

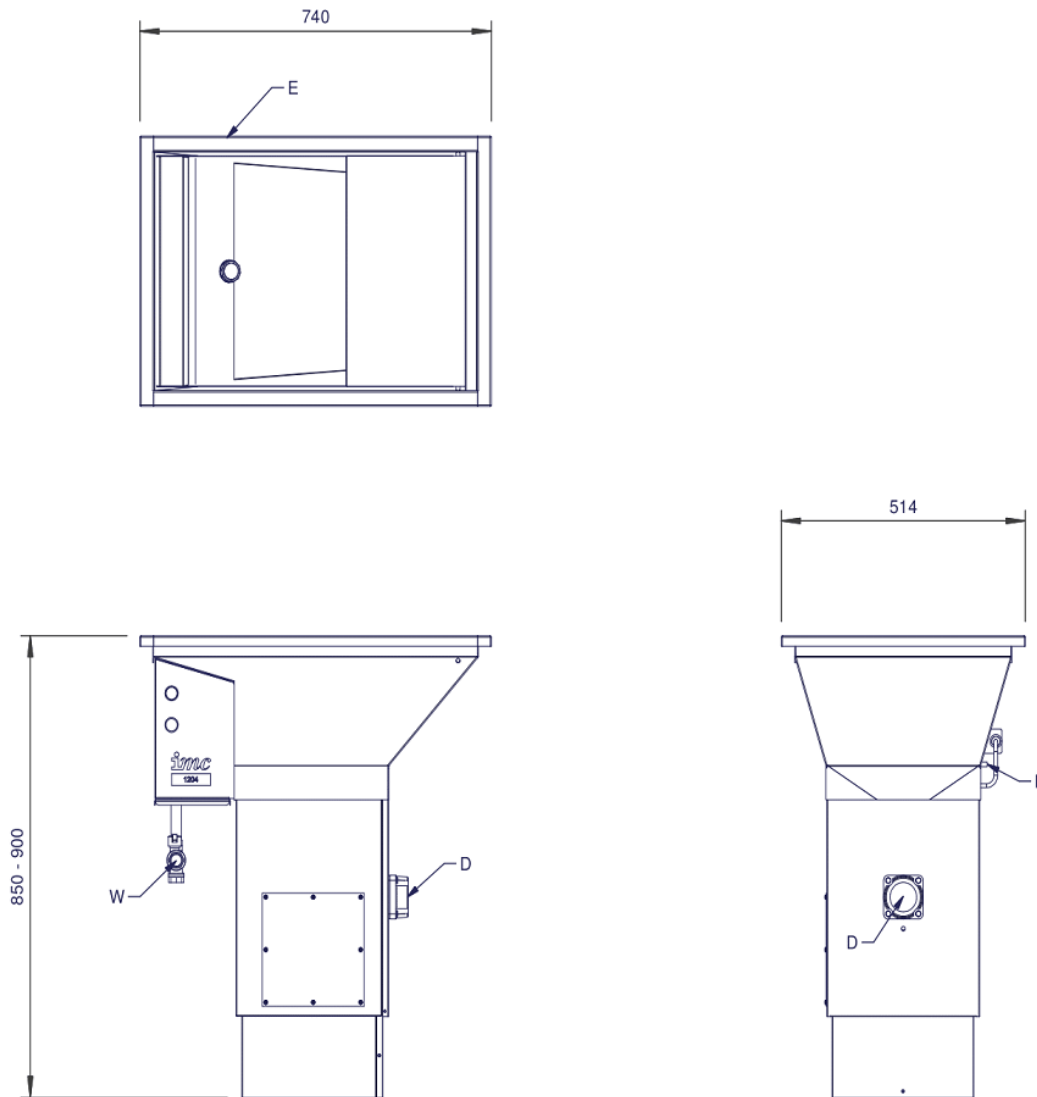

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024

