

IMC MF10 FREE-STANDING VEGETABLE PEELER - WITH ONION PLATE - 3 PHASE - W 481 MM - 0.37 KW

MODEL: F59/720





The versatile, energy-efficient MF10 Onion Peeler (3PH) is the ideal onion peeler for medium to large kitchens with three-phase power supply.

With a thick peeling plate for long operating life, the MF10 Onion (3PH) is able to peel up to 143.5kg of onions per hour in 10kg batches making it a cost-effective and labour-saving solution. For best results, we recommend onions are topped and tailed before peeling, and hand finished afterwards.

Easy to operate, the unit comes with an integral stand and removable filter basket. It has an interlocking lid and door for user safety. The MF10

PRODUCT OPTIONS AND ACCESSORIES

S59/166 Onion Peeling Plate for MF10/MF15 Vegetable Peeler

PRODUCT FEATURES

- Able to peel up to 143.5kg of onions per hour in 10kg batches.
- Smooth stainless steel waste outlet prevents blockages and build-up of peelings.
- Interlocking lid and door ensure safe operation.
- Perspex viewing pane allows you to monitor the peeling progress.
- Adjustable timer ensures accurate, repeatable peeling times.
- Modular construction facilitates easy maintenance.
- Thicker peeling plate delivers longer operating life.
- Suitable for medium to large kitchens with three-phase power supply.







IMC MF10 FREE-STANDING VEGETABLE PEELER - WITH ONION PLATE - 3 PHASE - W 481 MM - 0.37 KW

MODEL: F59/720

| WEIGHTS & DIMENSIONS | |
|----------------------|----------|
| Width | 481 mil |
| Depth | 629 mil |
| Height | 1105 mil |
| Weight | 52 kg |

| SHIPPING DETAILS | |
|----------------------------|--------------------------------|
| Ship Width | 50 cm |
| Ship Depth | 70 cm |
| Ship Height | 118 cm |
| Ship Weight | 58.8 kg |
| Number of Shipment Parcels | 1 |
| Ship Method | Small Parcel (FedEx, UPS, DHL) |
| Shipping Origin Zip Code | LN6 3QZ, UNITED KINGDOM |
| Quick Ship Product | No |

PRODUCT CERTIFICATIONS



| ENERGY SPECS | |
|---------------------------|-----------|
| Primary Energy Type | Electric |
| Electrical Total Amperage | 1.2 A |
| Electrical Volts | 400V |
| Electrical Total Wattage | 370 W |
| Electrical Kilowatts | 0.37 kW |
| Electrical Phase | 3-Phase |
| Electrical Plug Type | Hardwired |

| Number of Electrical Plugs | Not Applicable |
|--------------------------------------|------------------|
| Electrical Connection Type | Direct Hardwired |
| Number of Electrical Conductor Wires | 1 |
| Dedicated Circuit Required | Yes |
| Electrical Remarks | Three |
| Energy Saving | No |

| ADDITIONAL SPECIFICATIONS | |
|------------------------------|------------------------------|
| Airbreak | Yes |
| Control Type | On/Off, Rotary Control Knob |
| Hopper Load | 10 kg |
| Motor Power | 0.5 hp |
| Operator Safety Method | Interlock |
| Processing Capacity Per Hour | 143.5 kg |
| Timer Type | Mechanical/Traditional Timer |

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024







MODEL: F59/720


BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING



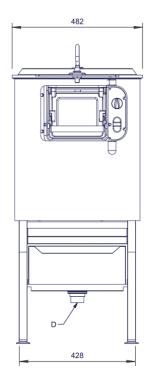

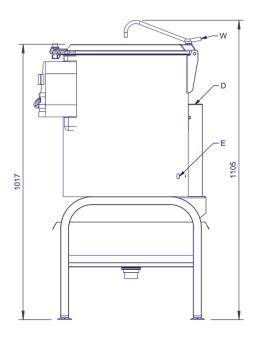

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024

