

IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -STAINLESS STEEL FRAME - H 900 MM - W 600 MM - D 450 MM -R290

MODEL: F76/153



Ventus

PRODUCT FEATURES

- Reduced 450mm depth
- Wide range of options available to customise your bottle cooler, ensure a perfect fit in any bar.
- Elegant, flexible storage for up to 96 bottles
- Dynamic Air Distribution System coupled with efficient compressors and improved insulation ensures superior cooling times.
- Electronic temperature control keeps drinks at the perfect serving temperature
- Energy efficient EcoSmart controller at the touch of a button, put the bottle cooler into its most economical state until next required
- Sleek stainless steel interior and LED lighting to enhance display
- Single double-glazed lockable door for enhanced security
- UK 3 pin plug allows users to simply plug in and switch on

Designed and manufactured with the highest attention to detail, the sophisticated Ventus V60 bottle cooler is the perfect fit for commercial bars, delivering optimum performance, long-term reliability and minimal operating costs.

The V60 provides flexible storage of up to 96 (330ml) bottles. The polished stainless steel interior and LED lighting enhance display, while the stainless steel exterior cabinet blends seamlessly into any bar setting.

Its electronic temperature controller, supported by an auto defrost function, provides precise monitoring, ensuring drinks are kept at perfect

AIA FILE NUMBER:







IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -STAINLESS STEEL FRAME - H 900 MM - W 600 MM - D 450 MM -

MODEL: F76/153

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	450 mil
Height	900 mil

SHIPPING DETAILS	
Ship Width	75 cm
Ship Depth	60 cm
Ship Height	111 cm
Ship Weight	77.55 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric
Electrical Total Amperage	1.64 A
Electrical Volts	240V
Electrical Total Wattage	393 W
Electrical Kilowatts	0.393 kW
Electrical Phase	1-Phase
Electrical Plug Type	UK 3-Pin Plug

Number of Electrical Plugs1Electrical Connection TypeCord and PlugNumber of Electrical Conductor Wires1Dedicated Circuit RequiredNoElectrical RemarksSingleEnergy SavingYes

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter
Capacity: Bottles	96
Capacity Volume	130
Control Type	Digital Touch Pad, Elec- tronic
Defrost Method	Automatic
Insulated	Yes

Number of Shelf Positions	29
Number of Shelves	2
Refrigerant Type	R-290
Temperature Maximum	6 °C
Temperature Minimum	2 °C
Type of Lighting	LED

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024

www.lincat.co.uk/brands/imc | p:+44 1522 875500






IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR -STAINLESS STEEL FRAME - H 900 MM - W 600 MM - D 450 MM -

MODEL: F76/153

TECHNICAL DRAWING

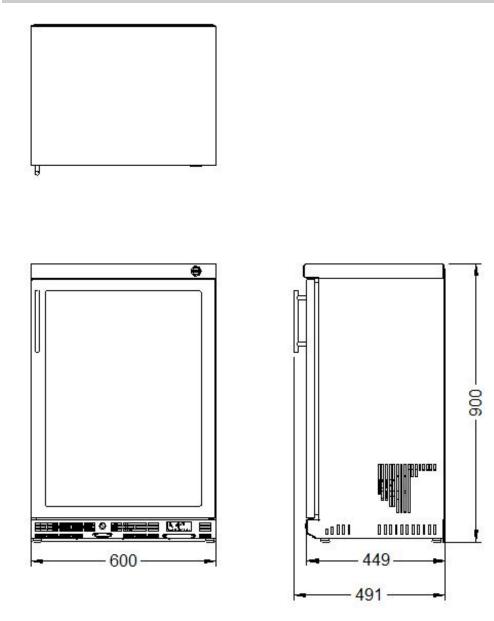

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

imc

Document Auto-Generated July 02, 2024

Whisby Road, Lincoln, LN6 3QZ, UK