

IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - FULL FRONT GLASS DOOR - STAINLESS STEEL FRAME - H 800 MM - W 600 MM -R290

MODEL: F76/172



Designed and manufactured with the highest attention to detail, the sophisticated Ventus V60 bottle cooler is the perfect fit for commercial bars, delivering optimum performance, long-term reliability and minimal operating costs.

The V60 provides flexible storage of up to 78 (330ml) bottles. The polished stainless steel interior and LED lighting enhance display, while the stainless steel exterior cabinet and full front door blend seamlessly into any bar setting.

Its electronic temperature controller, supported by an auto defrost function, provides precise monitoring, ensuring drinks are kept at perfect

Ventus

PRODUCT OPTIONS AND ACCESSORIES

- S76/048 Perforated Shelf for V60 500D
- A12/091/Z1 Wire Shelf Chrome for M60 Bottle Cooler

PRODUCT FEATURES

• Full front door for seamless integrationReduced 800mm heightWide range of options available to customise your bottle cooler, ensure a perfect fit in any bar.Dynamic Air Distribution System coupled with efficient compressors and improved insulation ensures superior cooling times.Elegant, flexible storage for up to 78 bottlesElectronic temperature control keeps drinks at the perfect serving temperatureEnergy efficient EcoSmart controller - at the touch of a button, put the bottle cooler into its most economical state until next requiredSleek stainless steel interior and LED lighting to enhance displayDouble glazed door for enhanced insulationUK 3 pin plug allows users to simply plug in and switch on AIA FILE NUMBER:







IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - FULL FRONT GLASS DOOR - STAINLESS STEEL FRAME - H 800 MM - W 600 MM -

MODEL: F76/172

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	500 mil
Height	800 mil
Weight	60 kg

66 cm
58 cm
110 cm
63 kg
1
Small Parcel (FedEx, UPS, DHL)
LN6 3QZ, UNITED KINGDOM
No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric
Electrical Total Amperage	1.64 A
Electrical Volts	240V
Electrical Total Wattage	393 W
Electrical Kilowatts	0.393 kW
Electrical Phase	1-Phase
Electrical Plug Type	UK 3-Pin Plug

Number of Electrical Plugs	1
Electrical Connection Type	Cord and Plug
Number of Electrical Conductor Wires	1
Dedicated Circuit Required	No
Electrical Remarks	Single
Energy Saving	Yes

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter
Capacity: Bottles	78
Capacity Volume	108
Control Type	Digital Touch Pad, Elec- tronic
Defrost Method	Automatic
Insulated	Yes

Number of Shelf Positions	29
Number of Shelves	2
Refrigerant Type	R-290
Temperature Maximum	6 °C
Temperature Minimum	2 °C
Type of Lighting	LED

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024






IMC VENTUS V60 BOTTLE COOLER [FRONT LOAD] - FULL FRONT GLASS DOOR - STAINLESS STEEL FRAME - H 800 MM - W 600 MM -


MODEL: F76/172

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING



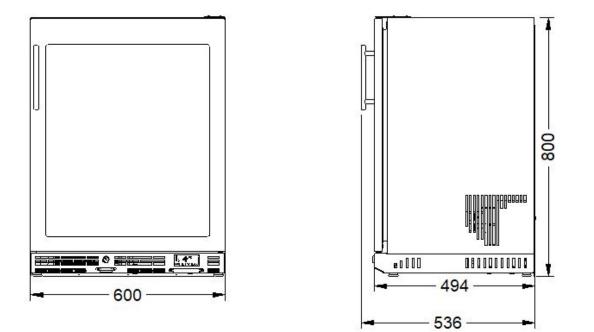

imc

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024

www.lincat.co.uk/brands/imc | p: +44 1522 875500

Whisby Road, Lincoln, LN6 3QZ, UK