



IMC MISTRAL M60 BOTTLE COOLER [FRONT LOAD] - HIGH AMBIENT - SOLID STAINLESS STEEL DOOR - H 900 MM - W 600 MM - 0.219 KW

MODEL: F77/115/SS



Mistral

The stylish Mistral M60 High Ambient bottle cooler is ideal for commercial bars, delivering optimum performance in ambient temperatures of up to 43°C, along with long-term reliability and low operating costs.

High performance insulation maintains temperature inside the unit, whilst ultra-low "U" value glass and trace-heated doors protect from external heat. Its electronic temperature controller, supported by an auto defrost function, provides precise monitoring, ensuring drinks are kept at perfect serving temperature. An energy-efficient forced air cooling system delivers rapid temperature pull down, to meet demand in the busiest of bars.

PRODUCT OPTIONS AND ACCESSORIES

- A12/091/Z1 Wire Shelf - Chrome - for M60 Bottle Cooler

PRODUCT FEATURES

- Stylish storage of up to 135 bottles in ambient conditions of up to 43°C
- Electronic temperature controller and auto defrost for perfectly-chilled drinks
- Energy-efficient forced air cooling for rapid temperature pull down
- Sleek stainless steel interior to enhance display
- Single solid lockable door for enhanced security
- UK 3 pin plug allows users to simply plug in and switch on
- Easy to remove and replace magnetic gaskets to facilitate cleaning

A/A FILE NUMBER:

ITEM NUMBER:



IMC MISTRAL M60 BOTTLE COOLER [FRONT LOAD] - HIGH AMBIENT - SOLID STAINLESS STEEL DOOR - H 900 MM - W 600

MODEL: F77/115/SS

WEIGHTS & DIMENSIONS

Width	600 mil
Depth	500 mil
Height	900 mil
Weight	59.5 kg

SHIPPING DETAILS

Ship Width	68 cm
Ship Depth	58 cm
Ship Height	108 cm
Ship Weight	65.45 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Number of Electrical Plugs	1
Electrical Total Amperage	1.9 A	Electrical Connection Type	Cord and Plug
Electrical Volts	240V	Number of Electrical Conductor Wires	1
Electrical Total Wattage	219 W	Dedicated Circuit Required	No
Electrical Kilowatts	0.219 kW	Electrical Remarks	Single
Electrical Phase	1-Phase	Energy Saving	No
Electrical Plug Type	UK 3-Pin Plug		

ADDITIONAL SPECIFICATIONS

Application Type	Undercounter	Number of Shelf Positions	29
Capacity: Bottles	135	Number of Shelves	2
Capacity Volume	133 l	Refrigerant Type	R-290
Control Type	Digital Touch Pad, Electronic	Temperature Maximum	6 °C
Defrost Method	Automatic	Temperature Minimum	2 °C
Insulated	Yes	Type of Lighting	LED

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024






IMC MISTRAL M60 BOTTLE COOLER [FRONT LOAD] - HIGH AMBIENT - SOLID STAINLESS STEEL DOOR - H 900 MM - W 600

MODEL: F77/115/SS

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

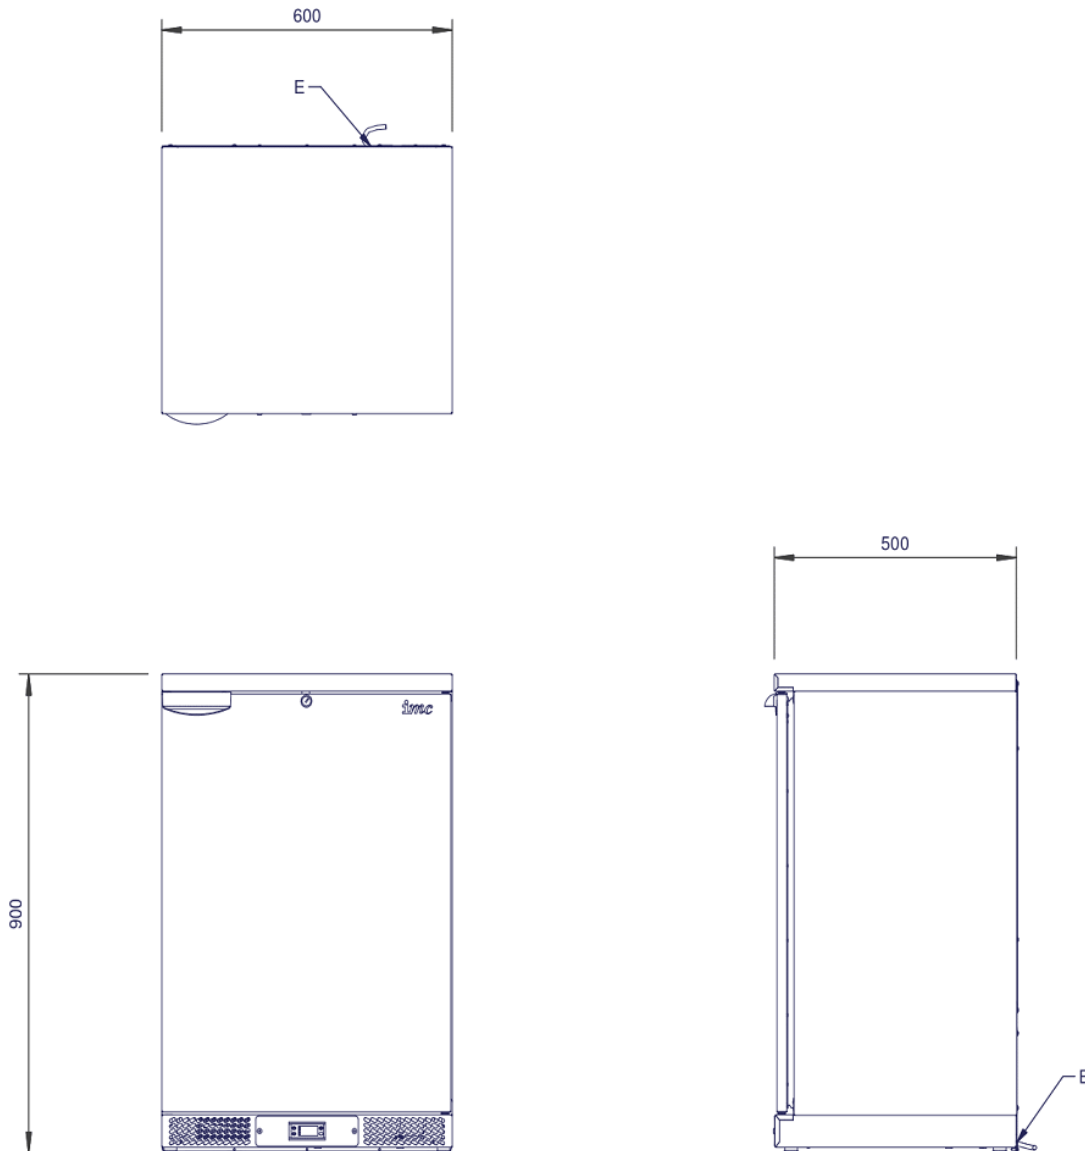

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
July 02, 2024