

IMC MISTRAL TC60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR - STAINLESS STEEL FRAME - H 1850 MM - W 600 MM - 0.759 KW

MODEL: F77/560



optimum performance, long-term reliability and low operating costs.

The TC60 provides easy storage of up to 272

Designed and manufactured to the highest specification, the stylish, slim Mistral TC60 bottle cooler is ideal for commercial bars, delivering

The TC60 provides easy storage of up to 272 (330ml) bottles. The polished stainless steel interior enhances display, whilst the stainless steel exterior cabinet blends perfectly into any bar setting.

Its electronic temperature controller, supported by an auto defrost function, provides precise monitoring, ensuring drinks are kept at perfect serving temperature. In addition, an energy-

Mistral

PRODUCT OPTIONS AND ACCESSORIES

• A12/041/Z2 Wire Shelf - Chrome - for TC60 Bottle Cooler

PRODUCT FEATURES

- Tall, space-saving storage for up to 272 bottles
- Electronic temperature controller and auto defrost for perfectlychilled drinks
- Energy-efficient forced air cooling for rapid temperature pull down
- Sleek stainless steel interior and LED lighting to enhance display
- Double-glazed door for enhanced security
- UK 3 pin plug allows users to simply plug in and switch on
- Easy to remove and replace magnetic gaskets to facilitate cleaning







IMC MISTRAL TC60 BOTTLE COOLER [FRONT LOAD] - GLASS DOOR - STAINLESS STEEL FRAME - H 1850 MM - W 600 MM - 0.759 KW

MODEL: F77/560

WEIGHTS & DIMENSIONS	
Width	600 mil
Depth	500 mil
Height	1850 mil
Weight	94 kg

SHIPPING DETAILS	
Ship Width	64 cm
Ship Depth	57 cm
Ship Height	198 cm
Ship Weight	103.4 kg
Number of Shipment Parcels	1
Ship Method	LTL Common Carrier
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS	
Primary Energy Type	Electric
Electrical Total Amperage	3.3 A
Electrical Volts	240V
Electrical Total Wattage	759 W
Electrical Kilowatts	0.759 kW
Electrical Phase	1-Phase
Electrical Plug Type	UK 3-Pin Plug

Number of Electrical Plugs	11_
Electrical Connection Type	Cord and Plug
Number of Electrical Conductor Wires	1_
Dedicated Circuit Required	No
Electrical Remarks	Single
Energy Saving	No

ADDITIONAL SPECIFICATIONS	
Application Type	Undercounter
Capacity: Bottles	272
Capacity Volume	305 l
Control Type	Digital Touch Pad, Elec- tronic
Defrost Method	Automatic
Insulated	Yes

Number of Shelf Positions	95
Number of Shelves	5
Refrigerant Type	R-290
Temperature Maximum	6°C
Temperature Minimum	2°C
Type of Lighting	LED

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024





MODEL: F77/560


BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING



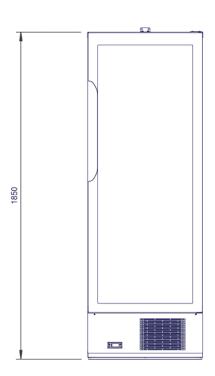

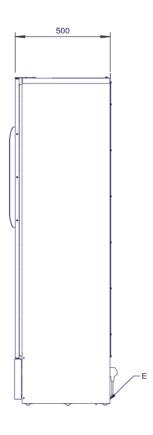

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024

