imc

IMC WASTESTATION COMPACT - 2.95 KW - SINGLE PHASE

MODEL: F79/701



Food waste typically represents around 40% of total commercial catering waste. Of this 40%, approximately 77% is liquid. The WasteStation Compact grinds the food waste into fine particles, these particles feed directly into the built-in dewatering system. Through centrifugal action, the WasteStation forces out the excess liquid from the macerated waste.

This "grey water" is fed directly to drain, the resulting solid fraction of the food waste is collected in small, easily managed, lidded bins, ready for onward processing.

PRODUCT OPTIONS AND ACCESSORIES

A13/159 Waste Scraper for WasteStation Compact

PRODUCT FEATURES

- A solution for your business process up to 400 kg waste per hour, the equivalent of 850 covers per sitting. As fast as you can input the waste, the WasteStation Compact can process it.
- Reduce your carbon footprint reduce the amount of food waste being sent to landfill. By removing water from food waste this reduces the final volume of waste to be disposed of.
- Save on valuable floor space with a unit which is more compact than bulky alternative models, without having to upgrade to a remote dewaterer.
- Transport savings reduce waste collection costs by up to 80% by reducing the food waste volume and weight requiring collection
- Storage savings by reducing the waste volume, on site waste storage facility requirements are also reduced
- Labour savings reduce staff time processing and managing waste, fast efficient disposal of food waste as and when you need to, with no schedule
- Self-cleaning operation WasteStation can undertake a thorough clean, ensuring the whole system is free of food and grease
- Self-emptying eliminates the need for staff to empty the auger assembly, reducing labour times required to operate the machine. Intelligent electronic sensor detects when the bin is full
- Visual control panel kitchens are a noisy environment, so
 WasteStation incorporates a simple LED display to allow monitoring of the state of the equipment during operation
- Energy savings compact design and short processing times ensure









MODEL: F79/701

WEIGHTS & DIMENSIONS	
Width	600 mil
Depth	700 mil
Height	1044 mil
Weight	95 kg

SHIPPING DETAILS	
Ship Width	80 cm
Ship Depth	120 cm
Ship Height	115 cm
Ship Weight	110 kg
Number of Shipment Parcels	1
Ship Method	LTL Common Carrier
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS	
Primary Energy Type	Electric
Electrical Total Amperage	13 A
Electrical Volts	230V
Electrical Total Wattage	2950 W
Electrical Kilowatts	2.95 kW
Electrical Phase	1-Phase
Electrical Plug Type	16A Commando Plug

Number of Electrical Plugs	1
Electrical Connection Type	Direct Hardwired
Number of Electrical Conductor Wires	1
Dedicated Circuit Required	Yes
Electrical Remarks	Single
Energy Saving	No

ADDITIONAL SPECIFICATIONS	
Airbreak	Yes
Control Type	On/Off
Legs or Casters	Legs
Meal Waste Servings Processed Per Sitting	850
Motor Power	3.95 hp
Operating Noise Level	83 dB
Operator Safety Method	User Guide

Self-Cleaning Capable	Yes
Waste Compaction Ratio	80 %
Waste Processing Capacity Per Hour: Weight	400 kg
Waste Types Processed	Medium (small pork/ chicken bones, vegeta- bles and fruit)
Water Consumption Rate	10 l/min

IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024







MODEL: F79/701

BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING

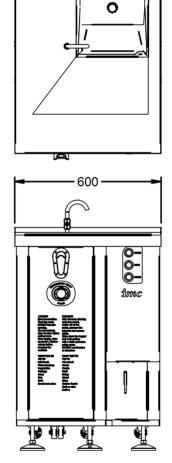



IMC reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated July 02, 2024

