



MODEL: P6B5

A great solution for holding and transporting food at the perfect temperature, the Panther 670 Series Hot Cupboard / Bain Marie is designed to fit through narrow doorways, so is ideal for pubs and smaller restaurants as well as nursing and care homes where plated meals are to be transported from the kitchen to the residents. Perfect for holding carvery and breakfast items either for self service or for back service, the unit is fan assisted, providing even heat distribution, fast heat up and recovery times, and lower energy usage. Fully 1/1 GN compatible, this unit accomodates 5 x 1/1 GN containers up to 150mm deep. Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations.

LINCAT PANTHER 670 SERIES FREE-STANDING HOT CUPBOARD -

PANTHER

PRODUCT OPTIONS AND ACCESSORIES

- CP16 CP16 CARVERY PAD [1/1 GASTRONORM SIZE]
- PLK/S PANTHER LEG KIT FOR CONVERSION IN THE FIELD
- PGK1 PGK1 GASTRONORM PACK
- PGK13 PGK13 GASTRONORM PACK
- PGK15 PGK15 GASTRONORM PACK
- PGK16 PGK16 GASTRONORM PACK
- PGK18 PGK18 GASTRONORM PACK
- PGK2 PGK2 GASTRONORM PACK
- PGK3 PGK3 GASTRONORM PACK PGK4 PGK4 - GASTRONORM PACK
- PGK7 PGK7 GASTRONORM PACK
- PHTC PHTC CERAMIC INSERT [1/1 GASTRONORM SIZE]
- PHTG PHTG GLASS INSERT [1/1 GASTRONORM SIZE]
- PPB6 PPB6 ADDITIONAL PUSHBAR

PRODUCT FEATURES

- Ideal to to fit through narrow corridors and doorways
- Bain marie top, ideal for small restaurants, cafes and pubs, as well as nursing and care homes, where the easy transportation of plated meals to diners and residents is a necessity
- Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 5 x 1/1 GN containers up to 150mm deep.
- Thermostatically controlled bain marie top can be operated with wet or dry heat. Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy
- Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads
- Drain tap located inside the hot cupboard allows fast and easy draining







LINCAT PANTHER 670 SERIES FREE-STANDING HOT CUPBOARD -BAIN MARIE TOP - 5GN - W 1855 MM - 5.2 KW

MODEL: P6B5

WEIGHTS & DIMENSIONS	
Width	1855 mil
Depth	672 mil
Height	912 mil
Weight	135.5 kg

SHIPPING DETAILS	
Ship Width	188 cm
Ship Depth	90 cm
Ship Height	110 cm
Ship Weight	149.05 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

PRODUCT CERTIFICATIONS



ENERGY SPECS	
Primary Energy Source Type	Electricity
Electrical Amps	22.6
Electrical Voltage	230 volts
Electrical Watts	5200
Electrical Phase	Single
Kilowatts	5.2 kW

Number of Electrical Conductor Wires	1_
Electrical Connection Type	Cord and Plug
Electrical Plug Type	UK 3-Pin Plug
Number of Electrical Plugs	11_
Dedicated Circuit Required	No
Energy Saving	No

ADDITIONAL SPECIFICATIONS	
Cart Style	Plated Meals and Pans
Control Type	Digital Touch Pad, Elec- tronic
Gastronorm Capacity	5 x GN1/1
Heating System	Electric
Legs or Casters	Casters
Number of Doors	2
Number of Shelf Positions	4

Number of Shelves	2
Plate Capacity	462
Plate Diameter	11.25" to 12.75"
Shelf Depth	512 mm
Shelf Width	1610 mm
Temperature Maximum	99 °C
Temperature Minimum	20 °C

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024






LINCAT PANTHER 670 SERIES FREE-STANDING HOT CUPBOARD -**BAIN MARIE TOP - 5GN - W 1855 MM - 5.2 KW**


MODEL: P6B5


BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING



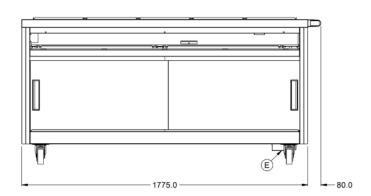



Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024

