

# OVEN RANGE - 6-ZONE - W 900 MM - 36KW [GAS] - 6KW [ELECTRIC]

### **MODEL: PHDR01/N**



Benefiting from the best of both - the focused, instant heat from the powerful gas burners, and the even cooking of the electric oven. Built to withstand the rigours of even the busiest kitchen, the large 4 x GN1/1 capacity oven is up to the task of delivering high volumes of top quality food, and enables four different foods to be cooked simultaneously. Strong and sturdy and built to last, the oven also comes with twin heavy-duty cast iron supports.

### PHOENIX

#### PRODUCT OPTIONS AND ACCESSORIES

OA8902 SPLASHBACK/SHFLE

#### **PRODUCT FEATURES**

- Powerful 6kW burners the pan will heat up quicker, speeding up processes such as boiling and sautéing, achieving a caramelised colour faster
- Fully pressed hob Simpler and quicker to clean
- Twin heavy-duty cast iron supports, built to withstand the rigours of the busiest kitchen
- Low flue, hob top accommodates larger pans
- Powerful 6kW twin fan assisted oven for more even cooking. Large 4 x GN1/1 capacity enabling four different foods to be cooked simultaneously
- 2 shelves and 5 shelf positions maximise oven space
- · Castors supplied as standard, not as a chargeable extra







## OVEN RANGE - 6-ZONE - W 900 MM - 36KW [GAS] - 6KW

## **MODEL: PHDR01/N**

WEIGHTS & DIMENSIONS	
Width	900 mil
Depth	800 mil
Height	900 mil
Weight	125 kg

SHIPPING DETAILS	
Ship Width	100 cm
Ship Depth	85 cm
Ship Height	105 cm
Ship Weight	137.5 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

#### **PRODUCT CERTIFICATIONS**



ENERGY SPECS	
Primary Energy Source Type	Electricity, Gas
Electrical Amps	Single Phase 26.1/Three Phase L1=8.7; L2=8.7; L3=8.7
Electrical Voltage	230 volts/400 volts
Electrical Watts	6000
Electrical Phase	Single, Three
Kilowatts	6 kW
Number of Electrical Conductor Wires	1
Electrical Connection Type	Direct Hardwired

Electrical Plug Type	Hardwired
Number of Electrical Plugs	Not Applicable
Dedicated Circuit Required	No
Gas Type	Natural Gas
Gas Inlet Size	0.75 in
Gas Inlet Pressure Required	20 mBar
Gas Total BTUs	122832 BTU
Gas Consumption at Max Use Per Hour	3.42 m <sup>3</sup>
Total Heat Input at Max Use	36 kW, 122832 BTU per hour

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024





## OVEN RANGE - 6-ZONE - W 900 MM - 36KW [GAS] - 6KW

## **MODEL: PHDR01/N**

ADDITIONAL SPECIFICATIONS			
Control Type	Mechanical	Open or Sealed Burners	Sealed
Cooking Plate Finish Material Type	Cast Iron Plate	Oven Power Rating	6 kW
Exterior Finish Color	Stainless Steel	Oven Temperature Maximum	250 °C
Exterior Trim Finish Color	Stainless Steel	Oven Temperature Minimum	40 °C
Gastronorm Capacity	4 x GN1/1	Restaurant or Heavy Duty	Yes
High Altitude Kit Available	No	Shelf Depth	512 mm
Number of Heating Zones	6	Shelf Width	710 mm
Number of Hot Top Burners	6	Watts Per Element	6000
Number of Shelf Positions	5	Cooking Equipment	Sealed Burner
Number of Shelves	2	BTUs Per Burner	6 KW

SELECT COOKING EQUIPMENT	NUMBER OF		POWER RATING	ARRANGE- MENT	WIDTH	DEPTH
Sealed Burner 1		6		Center	300 mm	300 mm
CELECT BACE FOILIDMENT	NIIMRED OE		CURIC CADACITY FACH	WIDTH	NEDTH	НЕІСИТ

SELECT BASE EQUIPMENT	NUMBER OF		CUBIC CAPACITY EACH	WIDTH	DEPTH	HEIGHT
Standard Oven 1		1		715 mm	530 mm	400 mm

#### **BIDDING SPECIFICATIONS**

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024









## **MODEL: PHDR01/N**

#### **TECHNICAL DRAWING**

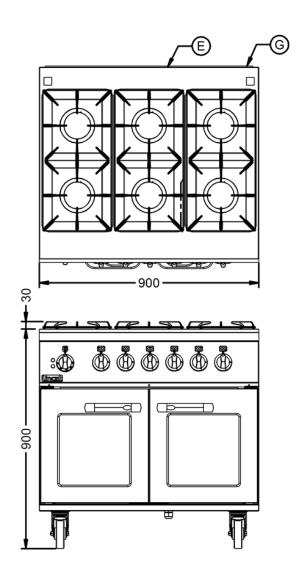

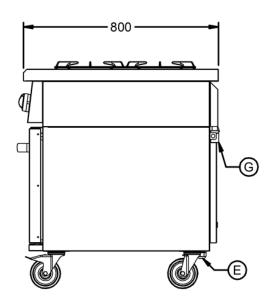

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024

